



Hygiene-Kombischichtenspeicher EH

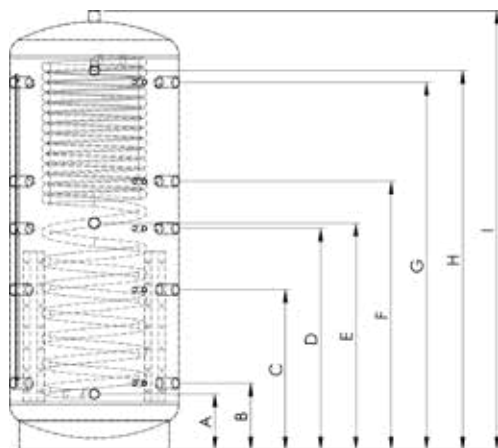

Verwendung		Dimension	550		750		900		1100		1250		1500		2000	
	Heizfläche Edelstahlwellrohr	m²	7,7		7,7		7,7		7,7		7,7		10,5		10,5	
	Inhalt Edelstahlwellrohr	l	39		39		39		35		35		49		49	
	Druckverlust bei 1.000 l/h	mbar	22		22		22		11		11		14		14	
	Druckverlust bei 3.000 l/h	mbar	210		210		210		112		112		140		140	
	Puffertemperatur	°C	60	80	60	80	60	80	60	80	60	80	60	80	60	80
	Warmwasserdauerleistung ^(A) 10 °C/45 °C (50 % Durchladung)	l/min	11,5	19,3	11,5	19,3	11,5	19,3	11,5	19,3	11,5	19,3	15,9	25,3	15,9	25,3
	Warmwasserdauerleistung ^(A) 10°C/45 °C (100% Dauerladung)	l/min	22,9	35,1	22,9	35,1	22,9	35,1	22,9	35,1	22,9	35,1	31,6	45,6	31,6	45,6
	max. Registerleistung	kW	55	105	55	105	55	105	55	105	55	105	77	145	77	145
	Einbringmaß Muffenlänge 100 mm	mm	740		800		800		850		950		1.000		1.100	
I	Höhe	ohne Isolierung - mm	1.630		1.690		2.040		2.170		2.010		2.130		2.350	
N	Durchmesser	ohne Isolierung - mm	700		790		790		850		950		1.000		1.100	
B	Anschluss 1	Höhe - mm	230		260		310		285		310		380		320	
		Anschluss - IG	1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
		Fühler - IG	1/2"		1/2"		1/2"		1/2"		1/2"		1/2"		1/2"	
		Höhe - mm	610		630		745		812		745		825		900	
C	Anschluss 2	Anschluss - IG	1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
		Fühler - IG	1/2"		1/2"		1/2"		1/2"		1/2"		1/2"		1/2"	
D	Anschluss 3	Höhe - mm			900		1.030		1.163		1.038		1.180		1.305	
		Anschluss - IG	n.V.		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
		Fühler - IG			1/2"		1/2"		1/2"		1/2"		1/2"		1/2"	
		Höhe - mm	990		1.030		1.250		1.338		1.250		1.350		1.490	
F	Anschluss 4	Anschluss - IG	1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
		Fühler - IG	1/2"		1/2"		1/2"		1/2"		1/2"		1/2"		1/2"	
		Höhe - mm	1.380		1.430		1.710		1.865		1.710		1.760		2.020	
		Anschluss - IG	1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
G	Anschluss 5	Fühler - IG	1/2"		1/2"		1/2"		1/2"		1/2"		1/2"		1/2"	
I	Anschluss oben	Höhe - mm	1.630		1.690		2.040		2.170		2.010		2.130		2.350	
		Anschluss - IG	1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
E	ESH	Höhe - mm	855		915		1.055		1.115		1.038		1.115		1.305	
		Anschluss - IG	1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
H	Edelstahlwellrohr Warmwasser	Höhe - mm	1.385		1.430		1.765		1.865		1.748		1.825		2.020	
		Anschluss - IG	1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"	
A	Edelstahlwellrohr Kaltwasser	Höhe - mm	230		260		260		285		243		320		320	
		Anschluss - IG	1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"	
O	Anordnung Fühler, Register		28,2		28,2		28,2		29,8		31,9		32,8		34,5	
Q	Position Fühlerklemmleiste		16,4		14,5		14,5		13,5		12,1		11,5		10	

^(A) rechnerischer Wert, die Durchladung bezieht sich auf den Puffer