



Hygiene-Kombischichtenspeicher EHSS

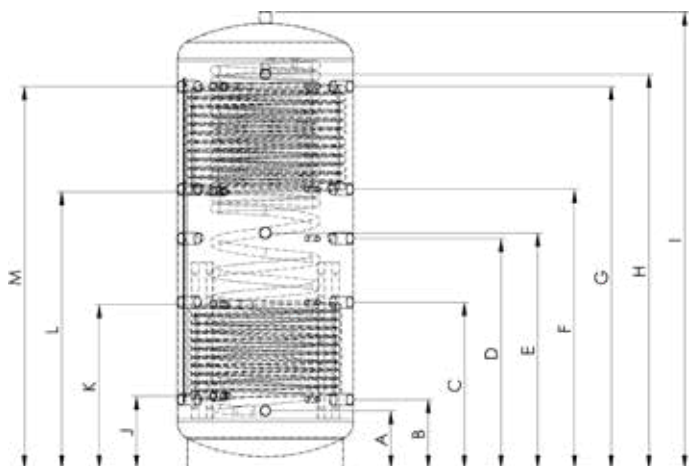

Verwendung	Dimension	550		750		900		1100		1250		1500		2000	
Register oben	m ²	1,2		1,8		2,4		2,4		2,4		2,4		2,6	
Inhalt Register oben	l	8,4		12,6		16,8		16,8		16,8		16,8		18,2	
Druckverlust Register oben	mbar	24		74		132		132		132		132		230	
Register unten	m ²	1,8		2,4		2,8		3,6		3		3,6		4,2	
Inhalt Register unten	l	12,6		16,8		19,6		21		21		25,2		29,4	
Druckverlust Register unten	mbar	74		132		248		265		265		318		372	
Heizfläche Edelstahlwellrohr	m ²	7,7		7,7		7,7		7,7		7,7		10,5		10,5	
Inhalt Edelstahlwellrohr	l	28		28		39		35		35		49		49	
Druckverlust bei 1.000 l/h	mbar	22		22		22		11		11		14		14	
Druckverlust bei 3.000 l/h	mbar	210		210		210		112		112		140		140	
Puffertemperatur	°C	60 80		60 80		60 80		60 80		60 80		60 80		60 80	
Warmwasserdauerleistung ^(A) 10 °C/45 °C (50 % Durchladung)	l/min	11,5 19,3		11,5 19,3		11,5 19,3		11,5 19,3		11,5 19,3		15,9 25,3		15,9 25,3	
Warmwasserdauerleistung ^(A) 10 °C/45 °C (100% Dauerladung)	l/min	22,9 35,1		22,9 35,1		22,9 35,1		22,9 35,1		22,9 35,1		31,6 45,6		31,6 45,6	
max. Registerleistung	kW	55 105		55 105		55 105		55 105		55 105		77 145		77 145	
Einbringmaß Muffenlänge 100 mm	mm	740		800		800		850		950		1.000		1.100	
I Höhe	ohne Isolierung - mm	1.630		1.690		2.040		2.170		2.010		2.130		2.350	
N Durchmesser	ohne Isolierung - mm	700		790		790		850		950		1.000		1.100	
B Anschluss 1	Höhe - mm	230		260		310		285		310		380		320	
	Anschluss - IG	1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
	Fühler - IG	1/2"		1/2"		1/2"		1/2"		1/2"		1/2"		1/2"	
C Anschluss 2	Höhe - mm	610		630		745		812		745		825		900	
	Anschluss - IG	1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
	Fühler - IG	1/2"		1/2"		1/2"		1/2"		1/2"		1/2"		1/2"	
D Anschluss 3	Höhe - mm	990		1.030		1.250		1.338		1.250		1.350		1.490	
	Anschluss - IG	1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
	Fühler - IG	1/2"		1/2"		1/2"		1/2"		1/2"		1/2"		1/2"	
F Anschluss 4	Höhe - mm	1.380		1.430		1.710		1.865		1.710		1.760		2.020	
	Anschluss - IG	1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
	Fühler - IG	1/2"		1/2"		1/2"		1/2"		1/2"		1/2"		1/2"	
G Anschluss 5	Höhe - mm	1.630		1.690		2.040		2.170		2.010		2.130		2.350	
	Anschluss - IG	1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
	Fühler - IG	1/2"		1/2"		1/2"		1/2"		1/2"		1/2"		1/2"	
I Anschluss oben	Höhe - mm	855		915		1.055		1.115		1.038		1.115		1.305	
	Anschluss - IG	1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"		1 1/2"	
	Fühler - IG	1/2"		1/2"		1/2"		1/2"		1/2"		1/2"		1/2"	
E ESH	Höhe - mm	790		745		735		930		870		920		1.170	
	Anschluss - IG	1"		1"		1"		1"		1"		1"		1"	
	Fühler - IG	1"		1"		1"		1"		1"		1"		1"	
J RL Register unten	Höhe - mm	1.270		1.400		1.710		1.815		1.690		1.760		1.970	
	Anschluss - IG	1"		1"		1"		1"		1"		1"		1"	
	Fühler - IG	1"		1"		1"		1"		1"		1"		1"	
M VL Register oben	Höhe - mm	920		1.045		1.240		1.275		1.250		1.410		1.440	
	Anschluss - IG	1"		1"		1"		1"		1"		1"		1"	
	Fühler - IG	1"		1"		1"		1"		1"		1"		1"	
L RL Register oben	Höhe - mm	1.385		1.430		1.765		1.865		1.748		1.825		2.020	
	Anschluss - IG	1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"	
	Fühler - IG	1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"	
H Edelstahlwellrohr Warmwasser	Höhe - mm	230		260		260		285		243		320		320	
	Anschluss - IG	1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"	
	Fühler - IG	1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"		1 1/4"	
A Edelstahlwellrohr Kaltwasser	Höhe - mm	28,2		28,2		28,2		29,8		31,9		32,8		34,5	
	Anschluss - IG	16,4		14,5		14,5		13,5		12,1		11,5		10	
	Fühler - IG	16,4		14,5		14,5		13,5		12,1		11,5		10	

^(A) rechnerischer Wert, die Durchladung bezieht sich auf den Puffer